

24" STAINLESS SOLID DOOR WINE CABINET

TUWADA-24-LS/RS-A~S

TUWADA-24-RS-A~S (Right hinged, standard)

TUWADA-24-LS-A~S (Left hinged, special order)

FEATURES


- 32" height allows for installation under ADA-compliant counter top.
- Articulating, soft close hinge allows fully integrated, flexible installations.
- Field-reversible hinge allows for flexibility in the field.
- Sleek black aluminum interior.
- Black powder coated steel exterior.
- Five pull-out PVC coated wire wine racks for storage of 7 bottles each and one floor wine cradle for storage of 5 bottles, 40 bottles total.
- Forced air refrigeration system which maintains 40°– 65°F (4.4°– 18.3°C).
- Environmentally friendly R600a refrigerant.
- Concealed digital temperature controls allows for precise temperature management.
- White LED lighting illuminates your product.
- UL-rated for outdoor use.
- Lock standard on stainless steel models.
- Unit comes standard with 4 adjustable leg levelers.
- NSF/ANSI Standard 7 compliant for packaged food product.

ORGANIZATION

- Five pull-out PVC coated wire wine racks for storage of 7 bottles each.
 - Shelf dimensions: 17¹/₁₆" W x 16⁷/₈" L.
- One floor wine cradle for storage of 5 bottles.

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at true-residential.com/custom.

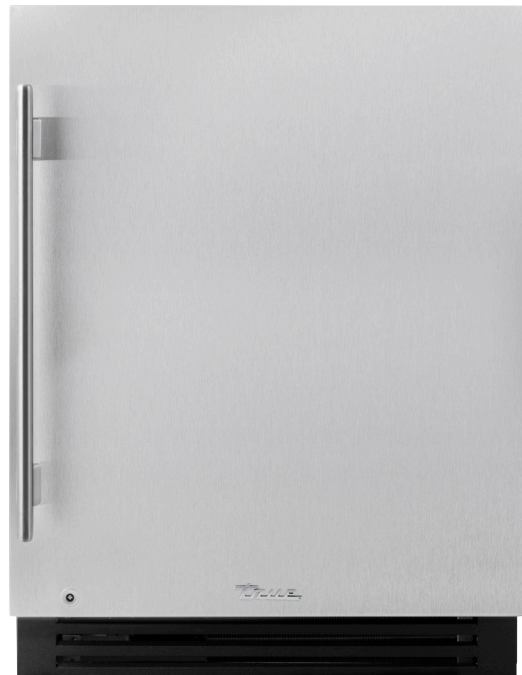

TUWADA-24-RS-A~S

SPECIFICATIONS

Dimensions (w x h x d) 23⁷/₁₆" x 31⁷/₁₆" x 23¹⁵/₁₆"

Cutout Dimensions (w x h x d) 24" x 32" x 24"

Other installation options available, consult install guide

Capacity (bottles) 40

Temperature Range 40°– 65°F (4.4°– 18.3°C)

Weight (lbs.) 225

Voltage 115/60/1 115/60/1 NEMA-5-15R

Amps 0.8


Annual Energy Consumption (kWh) 195

Power Cord Length (ft.) 10

Energy Star Rated –

24" STAINLESS SOLID DOOR WINE CABINET

TUWADA-24-LS/RS-A~S

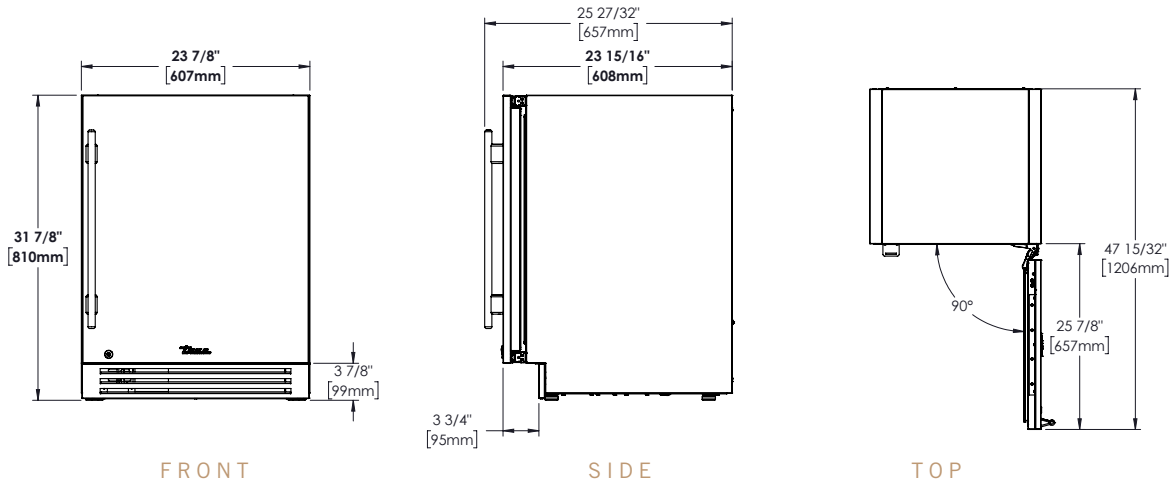

OPENING DIMENSIONS



MODEL OPTIONS

MODEL	FINISH
TUWADA-24-LS-A~S	Stainless solid door, left hinged
TUWADA-24-RS-A~S	Stainless solid door, right hinged

Overlay panel ready version also available.

ACCESSORIES (OPTIONAL)

- 2 1/2" legs
- 6" toe kick

WARRANTY

2 year full – parts & labor • 5 year sealed system – parts & labor