

15" OVERLAY READY DOOR CLEAR ICE MACHINE

TUI-15-R/L-OP-D

TUI-15-R-OP-D (Right hinged)

TUI-15-L-OP-D (Left hinged)

FEATURES

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Articulating, soft close hinge allows fully integrated, flexible installations.
- Field-reversible hinge for Overlay Panel Ready models allows for flexibility in the field.
- Produces up to 85lbs. of clear ice per day with a storage capacity of 28lbs.
- Bin Level Control for entertaining flexibility (50%, 65%, 70%, 85%, 100%).
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- True Precision Control® with steel touch technology and readout provides ice cycle status.
- Exclusive True Magna Scoop for easy storage on door.
- Industry exclusive, standard built-in drain pump.
- Built-in water filter rated up to 1250 gallons.
- Automatic cleaning system.
- All undercounter models UL rated for outdoor use.
- Energy Star rated.
- 3 year full warranty and 6 year parts/labor warranty on sealed system.

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at true-residential.com.

CUSTOMIZATION



SPECIFICATIONS

Dimensions* (w x h x d) 14⁷/₈" x 34¹/₄" x 23⁷/₈"

Cutout Dimensions (w x h x d) 15" x 34¹/₂" x 24"

Standard Overlay Panel (w x h x d) 14⁵/₈" x 30¹/₈" x ³/₄"

Panel provided by others. Other installation options available.
Consult install guide for details.

Operating Requirements

Air Temperature 40°F – 100°F
Water Temperature 40°F – 100°F
Water Pressure 20 – 80 PSIG

Maximum Ice Capacity (lbs/day) 85
Rated Ice Capacity (lbs/day) 75
Rated Ice Storage (lbs) 28
Rated Energy Consumption (kWh/lbs) 6.95 / 100
Rated Water Consumption (Gal/lbs) 25 / 100

Plumbing

Water Supply: ¼" OD copper, braided stainless steel or PEX tubing and compression fittings (not included).
Drain Pump Connection: ½" NPT.

Weight (lbs.) 125

Voltage 115/60/1



Amps 2.0

Power Cord Length (ft.) 8


Energy Star Rated Yes

*Dimensions may vary +/- 1/8"


***NOTE:** Overlay models have black powder coated steel exteriors.

15" OVERLAY READY DOOR CLEAR ICE MACHINE

TUI-15-R/L-OP-D — (shown with a $\frac{3}{4}$ " cabinetry panel)

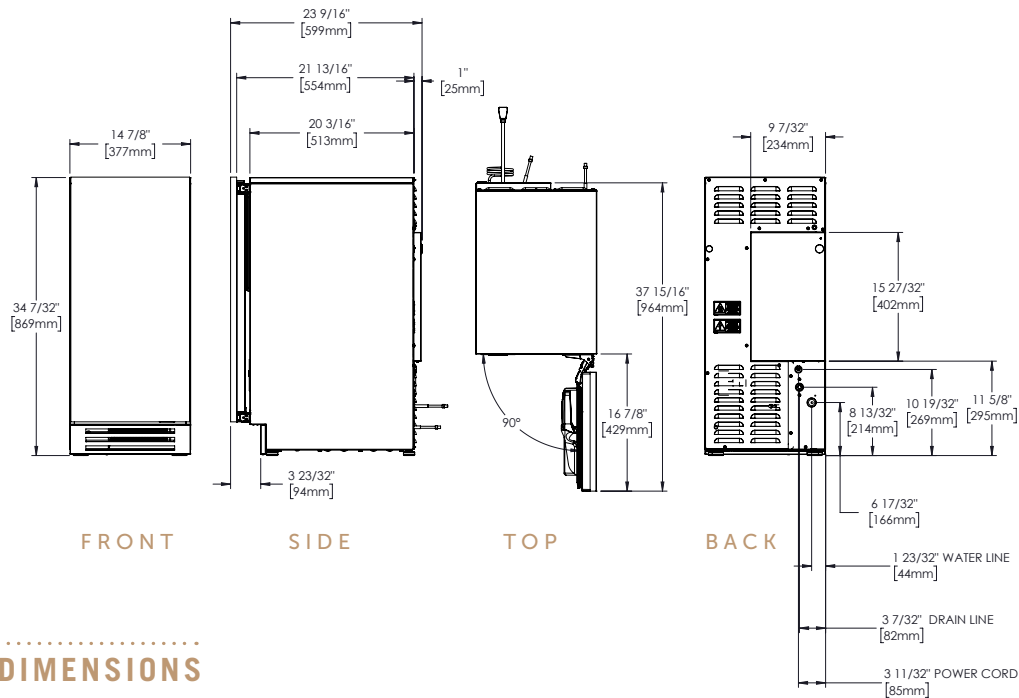

OPENING DIMENSIONS



MODEL OPTIONS

MODEL	FINISH
TUI-15-R-OP-D	Overlay panel right-hinged
TUI-15-L-OP-D	Overlay panel left-hinged

ACCESSORIES (OPTIONAL)

- Anti-condensation pads
- Descaling solution
- Replacement water filter

WARRANTY

- 3 year full – parts & labor
- 6 year sealed system – parts & labor